

# Product Information - Non-Invasive Flat Roof Mount (NIFRM)

## WTI ~ Non-Invasive Flat Roof Mount (NIFRM)

Engineered for use with Sidewinder mounts. Also works for Ambervision and C-MAX Ultra camera mounts.

### Features

- No roof penetration required!
- Mobile – mount can be moved without patching holes in roof or parapet.
- It's like having a moveable pole on your rooftop.

### Specifications

3 foot square base measurement.

30" pole height.

Strengthened with two 45° bars.




Commercial grade, height adjustable, rubberized feet.

Suggested minimum counterweight of 50 lbs. distributed on rear of base.  
(Weights not included.)



[www.gotowti.com](http://www.gotowti.com)

**Compatible with WTI's Sidewinder, Ambervision and C-MAX Ultra camera mounts. Please check those individual spec sheets for more detailed information.**

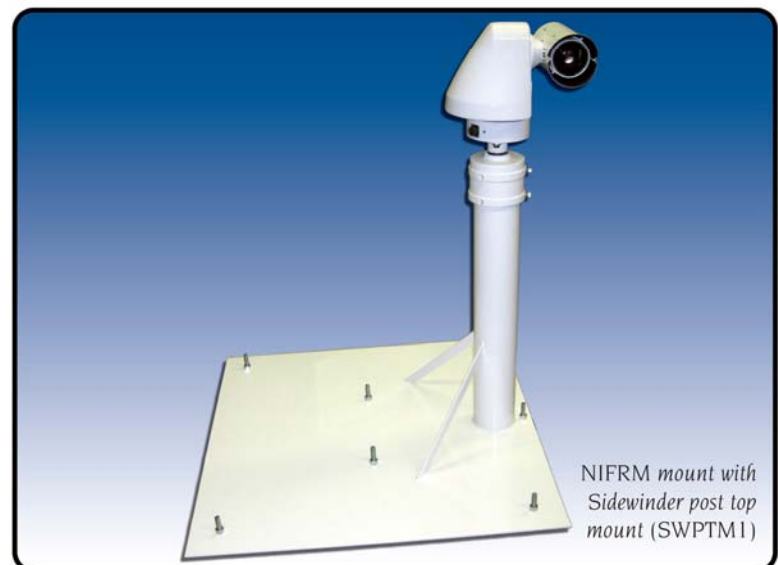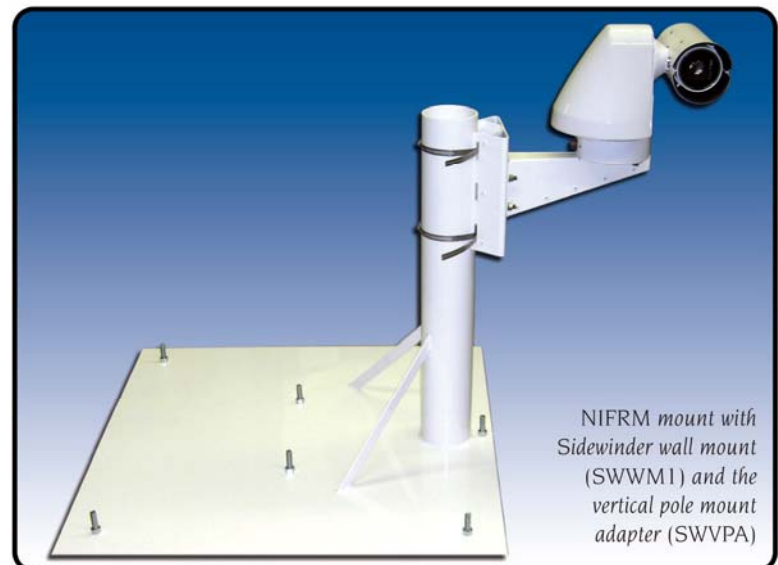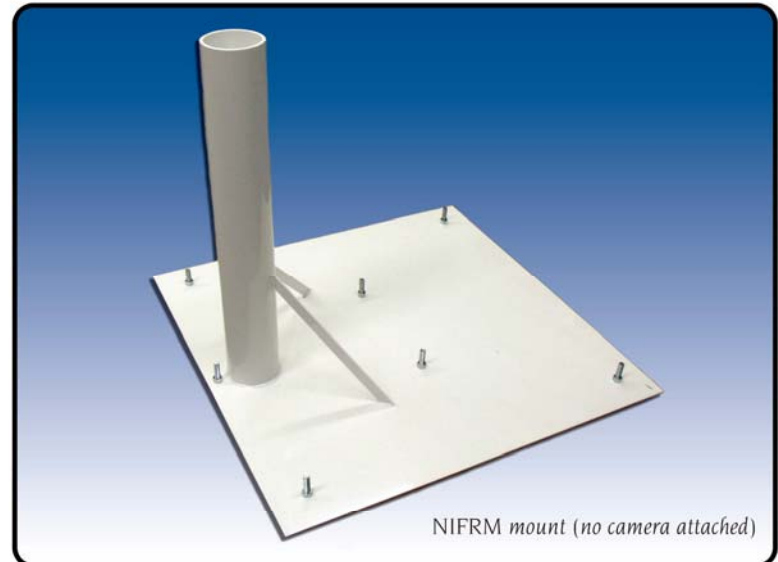

MADE IN THE USA

**Contact a WTI applications engineer to configure a system to perfectly suit your needs.**

Due to Wireless Technology, Inc.'s continuing efforts to engineer the best product, that is most responsive to our customer's needs, the above specifications are subject to change.